




APEX



SIZE
01 | 02 | 03



WATTS
06 | 08 | 10



BEAM ANGLES
MEDIUM | FLOOD



INGRESS
IP 54

TECHNICAL DATASHEET

APEX

DOWNLIGHT

Apex downlight collection offers deep reflector design for visual comfort with multiple options to chose from wattages ranging between 6W - 10W in Medium & Flood beam options and as made available across 3 varied size options to adopt to site requirements within the standard color spectrum.




IP54 (below ceiling) with overall IP20 design.

Standard protocol for fixed output driver is offered in our article coding. Dimmable driver & Interchangeable CCT options are available on request

Application Areas

Shopping centers, Retail outlets, Hospitals, Super markets

Ratings

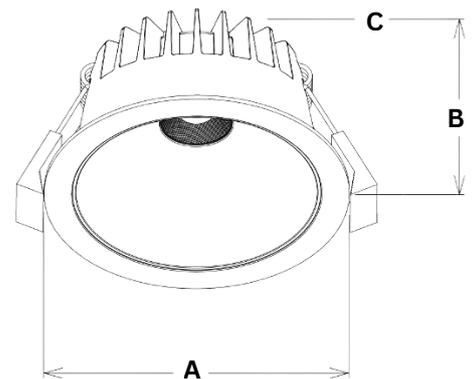

Technical Specifications

Light Source LED COB	Power Factor 0.9	Efficacy 100 lm/w
Lifespan 50000 Hrs	Dimming Triac / 0-10v / Dali	Input Voltage AC220-240V
CRI 80	Material Diecast Aluminum and Glass	

Dimensions (mm)

	A	B	C	D
Size 1	80	46	66	60
Size 2	95	51	80	75
Size 3	102	51	86	81

Available Options

Light Distribution	Watt	Lumen	Color Temp	Finishes
36 deg Medium (M) 60 deg Flood (F)	6	620	3000 K	White
	8	800	4000 K	Black
	10	960	5000 K	

TECHNICAL DATASHEET

APEX

DOWNLIGHT

SIZE 1

DIMENSION – 80 mm

Article Reference	Finish	Watt	Lumen	Colour Temp	Beam Angle
AP 111 006 3 M	White (1)	6	520 lm	3000 K	36 deg
AP 111 006 4 M	White (1)	6	520 lm	4000 K	36 deg
AP 111 006 5 M	White (1)	6	520 lm	5000 K	36 deg
AP 121 006 3 M	Black (2)	6	520 lm	3000 K	36 deg
AP 121 006 4 M	Black (2)	6	520 lm	4000 K	36 deg
AP 121 006 5 M	Black (2)	6	520 lm	5000 K	36 deg
AP 111 008 3 M	White (1)	8	800 lm	3000 K	36 deg
AP 111 008 4 M	White (1)	8	800 lm	4000 K	36 deg
AP 111 008 5 M	White (1)	8	800 lm	5000 K	36 deg
AP 121 008 3 M	Black (2)	8	800 lm	3000 K	36 deg
AP 121 008 4 M	Black (2)	8	800 lm	4000 K	36 deg
AP 121 008 5 M	Black (2)	8	800 lm	5000 K	36 deg

SIZE 2

DIMENSION – 95 mm

Article Reference	Finish	Watt	Lumen	Colour Temp	Beam Angle
AP 112 006 3 F	White (1)	6	620 lm	3000 K	60 deg
AP 112 006 4 F	White (1)	6	620 lm	4000 K	60 deg
AP 112 006 5 F	White (1)	6	620 lm	5000 K	60 deg
AP 122 006 3 F	Black (2)	6	620 lm	3000 K	60 deg
AP 122 006 4 F	Black (2)	6	620 lm	4000 K	60 deg
AP 122 006 5 F	Black (2)	6	620 lm	5000 K	60 deg
AP 112 008 3 F	White (1)	8	840 lm	3000 K	60 deg
AP 112 008 4 F	White (1)	8	840 lm	4000 K	60 deg
AP 112 008 5 F	White (1)	8	840 lm	5000 K	60 deg
AP 122 008 3 F	Black (2)	8	840 lm	3000 K	60 deg
AP 122 008 4 F	Black (2)	8	840 lm	4000 K	60 deg
AP 122 008 5 F	Black (2)	8	840 lm	5000 K	60 deg

SIZE 3

DIMENSION – 102 mm

Article Reference	Finish	Watt	Lumen	Colour Temp	Beam Angle
AP 113 010 3 M	White (1)	10	960 lm	3000 K	36 deg
AP 113 010 4 M	White (1)	10	960 lm	4000 K	36 deg
AP 113 010 5 M	White (1)	10	960 lm	5000 K	36 deg
AP 123 010 3 M	Black (2)	10	960 lm	3000 K	36 deg
AP 123 010 4 M	Black (2)	10	960 lm	4000 K	36 deg
AP 123 010 5 M	Black (2)	10	960 lm	5000 K	36 deg