


# BUTTON


---



**SIZE**  
01 | 02



**WATTS**  
13 | 20 | 25 | 30



**BEAM ANGLES**  
SPOT | MEDIUM | FLOOD



**INGRESS**  
IP 20

TECHNICAL DATASHEET

# BUTTON

## TRACKLIGHTS

Button Tracklight collection is based on vertical & horizontal rotary design. Offered wattages are 13W - 30W in Spot, Medium & Flood beam options. Replaceable ring options in black, white, silver & gold to adapt to site requirements within the standard color spectrums.

Luminaire can be adjusted 90° vertical and 350° in horizontal rotation. The complete range is IP20 suitable for indoor applications as offered.


Standard protocol for fixed output driver is offered in our article coding. Dimmable driver options are available on request.



### Application Areas

Shopping centers, Retail outlets, Hospitals, Super markets

### Ratings

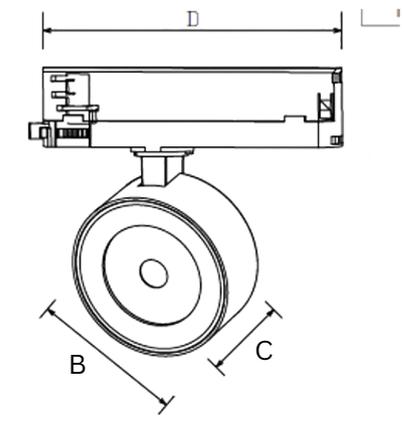

### Technical Specifications

Light Source <b>LED COB</b>	Power Factor <b>0.9</b>	Efficacy <b>100 lm/w</b>
Lifespan <b>50000 Hrs</b>	Dimming <b>Triac / 0-10v / Dali</b>	Input Voltage <b>AC220-240V</b>
CRI <b>80</b>	Material <b>Diecast Aluminum and Glass</b>	

### Dimensions (mm)

	A	B
Size 1	90	43
Size 2	120	43

### Available Options

Light Distribution	Watt	Lumen	Color Temp	Finishes
15 deg Spot (S) 60 deg Flood (F)	13	1600	2700 K	White
24 deg Medium (M)	20	2300	3000 K	Black
	25	2650		
	30	3200	4000 K	

## TECHNICAL DATASHEET

# BUTTON

## TRACKLIGHTS

**SIZE 1**

DIMENSION - 90 mm

Article Reference	Finish	Watt	Lumen	Colour Temp	Beam Angle
BU 111 013 2 S	White (1)	13	1600 lm	2700 K	15 deg
BU 111 013 3 S	White (1)	13	1600 lm	3000 K	15 deg
BU 111 013 4 S	White (1)	13	1600 lm	4000 K	15 deg
BU 121 013 2 S	Black (2)	13	1600 lm	2700 K	15 deg
BU 121 013 3 S	Black (2)	13	1600 lm	3000 K	15 deg
BU 121 013 4 S	Black (2)	13	1600 lm	4000 K	15 deg
BU 111 020 2 M	White (1)	20	2300 lm	2700 K	24 deg
BU 111 020 3 M	White (1)	20	2300 lm	3000 K	24 deg
BU 111 020 4 M	White (1)	20	2300 lm	4000 K	24 deg
BU 121 020 2 M	Black (2)	20	2300 lm	2700 K	24 deg
BU 121 020 3 M	Black (2)	20	2300 lm	3000 K	24 deg
BU 121 020 4 M	Black (2)	20	2300 lm	4000 K	24 deg

**SIZE 2**

DIMENSION - 120 mm

Article Reference	Finish	Watt	Lumen	Colour Temp	Beam Angle
BU 112 025 2 M	White (1)	25	2650 lm	2700 K	24 deg
BU 112 025 3 M	White (1)	25	2650 lm	3000 K	24 deg
BU 112 025 4 M	White (1)	25	2650 lm	4000 K	24 deg
BU 122 025 2 M	Black (2)	25	2650 lm	2700 K	24 deg
BU 122 025 3 M	Black (2)	25	2650 lm	3000 K	24 deg
BU 122 025 4 M	Black (2)	25	2650 lm	4000 K	24 deg
BU 112 030 2 F	White (1)	30	3200 lm	2700 K	60 deg
BU 112 030 3 F	White (1)	30	3200 lm	3000 K	60 deg
BU 112 030 4 F	White (1)	30	3200 lm	4000 K	60 deg
BU 122 030 2 F	Black (2)	30	3200 lm	2700 K	60 deg
BU 122 030 3 F	Black (2)	30	3200 lm	3000 K	60 deg
BU 122 030 4 F	Black (2)	30	3200 lm	4000 K	60 deg