



FLASH



SIZE
01



WATTS
20 | 35



BEAM ANGLES
ADJUSTABLE



INGRESS
IP 20

TECHNICAL DATASHEET

FLASH

TRACKLIGHTS

Flash Shapeable tracklight collection is based on vertical & horizontal rotary design. Offered wattages are 20W & 35W in Shapeable beam options to adapt to site requirements within the standard color spectrums.

Luminaire can be used for focus lighting and framing effects. Luminaire can be adjusted 180° swing angle and 355° in horizontal rotation. The complete range is IP20 suitable for indoor applications as offered.


Product offered is with tunable CCT provided with 0-10V / DALI / knob dim options.



Application Areas

Shopping centers, Retail outlets, Hospitals, Super markets

Ratings

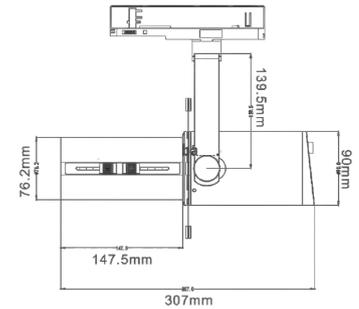

Technical Specifications

Light Source LED COB	Power Factor 0.9	Efficacy 100 lm/w
Lifespan 50000 Hrs	Dimming Triac / 0-10v / Dali	Input Voltage AC220-240V
CRI 80	Material Diecast Aluminum and Glass	

Dimensions (mm)

	A	B	C
Size 1	Ø70-90	307	139.5

Available Options

Light Distribution	Watt	Lumen	Color Temp	Finishes
deg Adjustable (A)	20	1800	3000 K	Black
	35	3150	4000 K	
			5000 K	

TECHNICAL DATASHEET

FLASH

TRACKLIGHTS

SIZE 1

DIMENSION -

Ø 90X307 mm

Article Reference	Finish	Watt	Lumen	Colour Temp	Beam Angle
FL 124 020 3 A	Black (2)	20	1800 lm	3000 K	Adjustable
FL 124 020 4 A	Black (2)	20	1800 lm	4000 K	Adjustable
FL 124 020 5 A	Black (2)	20	1800 lm	5000 K	Adjustable
FL 124 020 3 A	Black (2)	20	1800 lm	3000 K	Adjustable
FL 124 020 4 A	Black (2)	20	1800 lm	4000 K	Adjustable
FL 124 020 5 A	Black (2)	20	1800 lm	5000 K	Adjustable
FL 124 035 3 A	Black (2)	35	3150 lm	3000 K	Adjustable
FL 124 035 4 A	Black (2)	35	3150 lm	4000 K	Adjustable
FL 124 035 5 A	Black (2)	35	3150 lm	5000 K	Adjustable
FL 124 035 3 A	Black (2)	35	3150 lm	3000 K	Adjustable
FL 124 035 4 A	Black (2)	35	3150 lm	4000 K	Adjustable
FL 124 035 5 A	Black (2)	35	3150 lm	5000 K	Adjustable