



GRID



SIZE
01 | 02



WATTS
08 | 16



BEAM ANGLES
SPOT | MEDIUM | FLOOD



INGRESS
IP 20

TECHNICAL DATASHEET

GRID

DOWNLIGHT

Grid gyro design downlight collection in clean finishes offers multiple options to chose from wattages between 8W - 12W in all standard symmetric beam options and as made available across 2 varied size options to adopt to site requirements within the standard color spectrum.

Luminaire can be tilted 23° in all 360° coverage, to meet light orientation demands. Easy installation and maintenance.


Standard protocol for fixed output driver is offered in our article coding. Dimmable driver & Dim to Warm options are available on request.



Application Areas

Shopping centers, Retail outlets, Hospitals, Super markets

Ratings

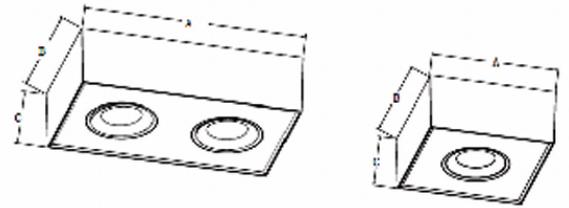

Technical Specifications

Light Source LED COB	Power Factor 0.9	Efficacy 100 lm/w
Lifespan 50000 Hrs	Dimming Triac / 0-10v / Dali	Input Voltage AC220-240V
CRI 80	Material Diecast Aluminum and Glass	

Dimensions (mm)

	A	B	C
Size 1	135	135	60
Size 2	224	135	60

Available Options

Light Distribution	Watt	Lumen	Color Temp	Finishes
15 deg Spot (S) / 30 deg Medium (M)	8 / 16	800 / 1550	2700 K	White
60 deg Flood (F)			3000 K	Black
			4000 K	Silver

TECHNICAL DATASHEET

GRID

DOWNLIGHT

SIZE 1

DIMENSION -
135X135 mm

Article Reference	Finish	Watt	Lumen	Colour Temp	Beam Angle
GR 112 008 2 S	White (1)	8	800 lm	2700 K	15 deg
GR 112 008 3 S	White (1)	8	800 lm	3000 K	15 deg
GR 112 008 4 S	White (1)	8	800 lm	4000 K	15 deg
GR 122 008 2 S	Black (2)	8	800 lm	2700 K	15 deg
GR 122 008 3 S	Black (2)	8	800 lm	3000 K	15 deg
GR 122 008 4 S	Black (2)	8	800 lm	4000 K	15 deg
GR 152 008 2 S	Silver (5)	8	800 lm	2700 K	15 deg
GR 152 008 3 S	Silver (5)	8	800 lm	3000 K	15 deg
GR 152 008 4 S	Silver (5)	8	800 lm	4000 K	15 deg
GR 112 008 2 M	White (1)	8	800 lm	2700 K	30 deg
GR 112 008 3 M	White (1)	8	800 lm	3000 K	30 deg
GR 112 008 4 M	White (1)	8	800 lm	4000 K	30 deg
GR 122 008 2 M	Black (2)	8	800 lm	2700 K	30 deg
GR 122 008 3 M	Black (2)	8	800 lm	3000 K	30 deg
GR 122 008 4 M	Black (2)	8	800 lm	4000 K	30 deg
GR 152 008 2 M	Silver (5)	8	800 lm	2700 K	30 deg
GR 152 008 3 M	Silver (5)	8	800 lm	3000 K	30 deg
GR 152 008 4 M	Silver (5)	8	800 lm	4000 K	30 deg
GR 112 008 2 F	White (1)	8	800 lm	2700 K	60 deg
GR 112 008 3 F	White (1)	8	800 lm	3000 K	60 deg
GR 112 008 4 F	White (1)	8	800 lm	4000 K	60 deg
GR 122 008 2 F	Black (2)	8	800 lm	2700 K	60 deg
GR 122 008 3 F	Black (2)	8	800 lm	3000 K	60 deg
GR 122 008 4 F	Black (2)	8	800 lm	4000 K	60 deg
GR 152 008 2 F	Silver (5)	8	800 lm	2700 K	60 deg
GR 152 008 3 F	Silver (5)	8	800 lm	3000 K	60 deg
GR 152 008 4 F	Silver (5)	8	800 lm	4000 K	60 deg

SIZE 2

DIMENSION -
224X135 mm

Article Reference	Finish	Watt	Lumen	Colour Temp	Beam Angle
GR 113 016 2 S	White (1)	16	1550 lm	2700 K	15 deg
GR 113 016 3 S	White (1)	16	1550 lm	3000 K	15 deg
GR 113 016 4 S	White (1)	16	1550 lm	4000 K	15 deg
GR 123 016 2 S	Black (2)	16	1550 lm	2700 K	15 deg
GR 123 016 3 S	Black (2)	16	1550 lm	3000 K	15 deg
GR 123 016 4 S	Black (2)	16	1550 lm	4000 K	15 deg
GR 153 016 2 S	Silver (5)	16	1550 lm	2700 K	15 deg
GR 153 016 3 S	Silver (5)	16	1550 lm	3000 K	15 deg
GR 153 016 4 S	Silver (5)	16	1550 lm	4000 K	15 deg
GR 113 016 2 M	White (1)	16	1550 lm	2700 K	30 deg
GR 113 016 3 M	White (1)	16	1550 lm	3000 K	30 deg
GR 113 016 4 M	White (1)	16	1550 lm	4000 K	30 deg