



DC48V&DC24V
Woven track
combined with ultra-
thin magnetic linear
track display scene

MT26&UT16
different size
optional to fit your
project demands




Woven
track



Surface
mounted
track



Surface
scraping
track



Hoisting
track



Embedded
track



Soft
membrane
ceiling track

6mm ultra-thin thickness



The track bar can be integrated into the non-main light solution for the post-installation and tooling market, the installation is simpler and more convenient, and the DIY splicing can be made by itself to create a more concise space aesthetic



6mm [




In the lighting design, based on the use of traditional lines and tracks, get rid of the constraints in space design, expand the thinking of lighting designers to achieve unrestrained lighting display. This is not only the effect of the lighting display, but also the brush of the lighting designer for the space lighting design, which is a set of flexible artworks

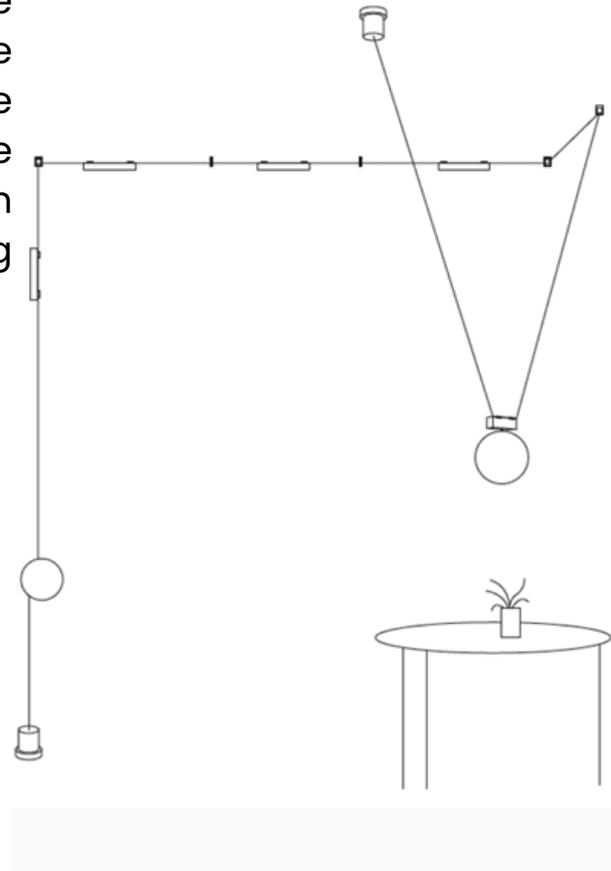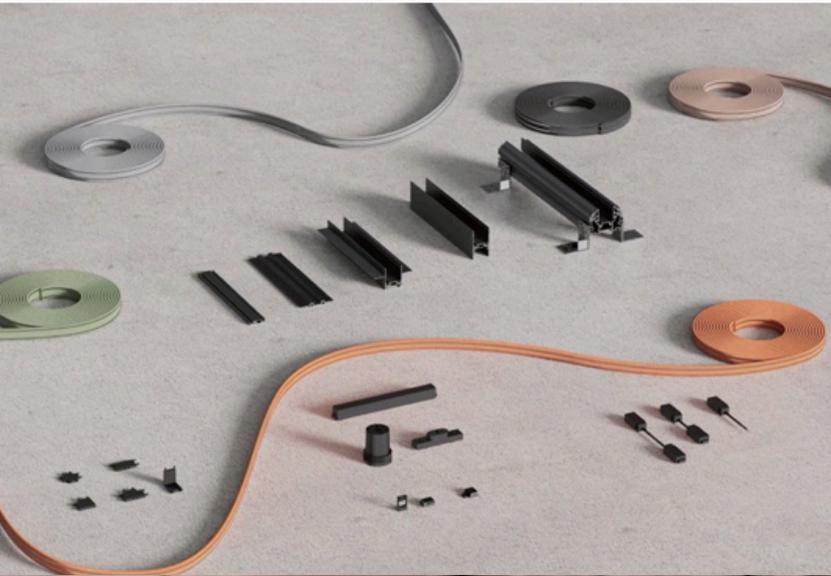

INSTALLATION ELEMENT



24V ultra thin linear track

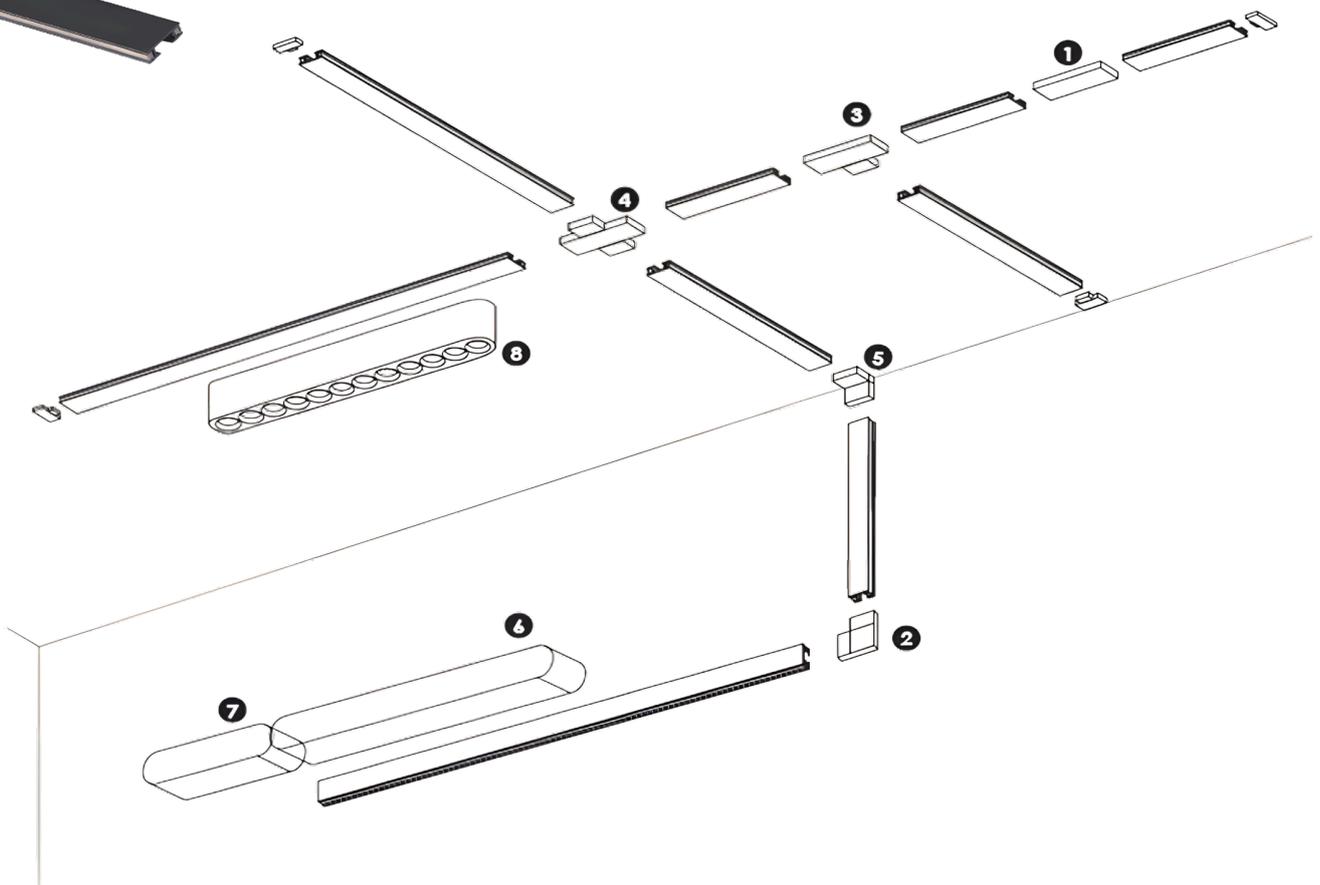

1
I-connect



4
Cross-connect



7
Cable Box
The cable storage box is used to hide the external wires



2
L-connect



5
Perpendicularity L-connect
The ceiling track is connect with the wall track and electrified



8
Grille light 12 in 1
After the installation successfull the lamps can be installed for Lighting




3
T-connect



6
Power supply
The track is energized by a power supply that changes the voltage to 24V

24V insert linear track



- Track can be cut arbitrarily
- The Lamp have safety locks

Product Size:

- 1000x65x35mm
- 2000x65x35mm
- 3000x65x35mm

- Watt: 200W (Max)
- Voltage: DC 24V
- Color: Black
- Material: Aluminum+ Copper



24V concealed linear track



Track bar dust cover



Track bar end cover




L-connect




Perpendicularity L-connect



Direct power module
Angle power module

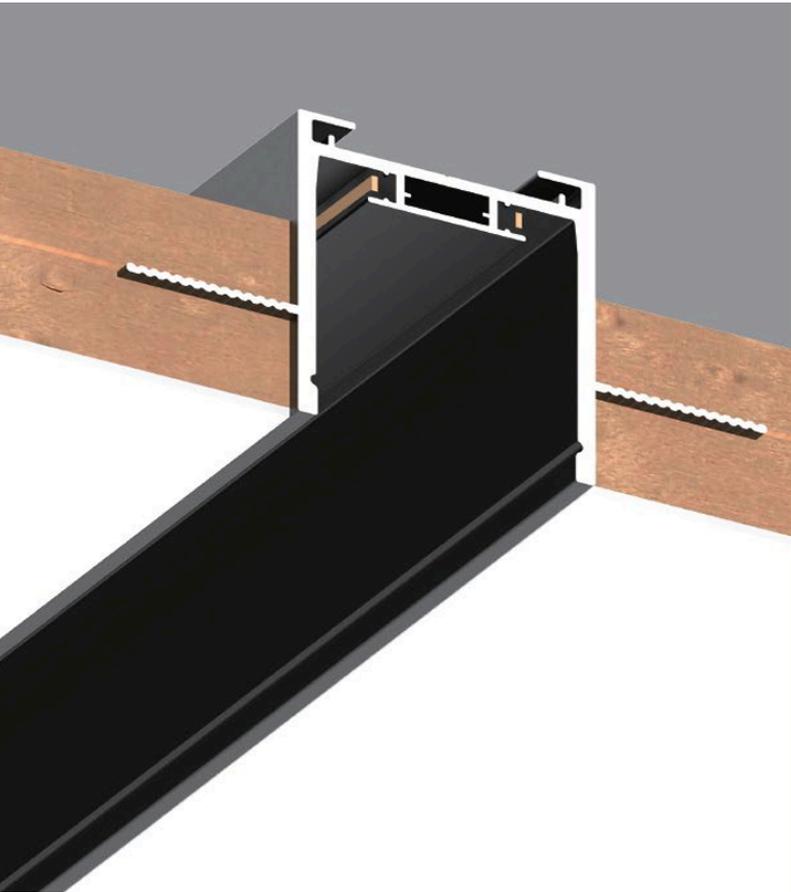

24V soft membrane ceiling track



- Track can be cut arbitrarily
- The Lamp have safety locks

Product Size:

- 1000x59.5x41 mm
- 2000x59.5x41 mm
- 3000x59.5x41 mm
- Watt: 200W(Max)
- Voltage: DC 24V
- Color: Black
- Material: Aluminum+ Copper



Soft membrane ceiling track



Track side cover



L-connect



Reinforcing member



Reinforcing member



Reinforcing member




Reinforcing member



Silicone strip



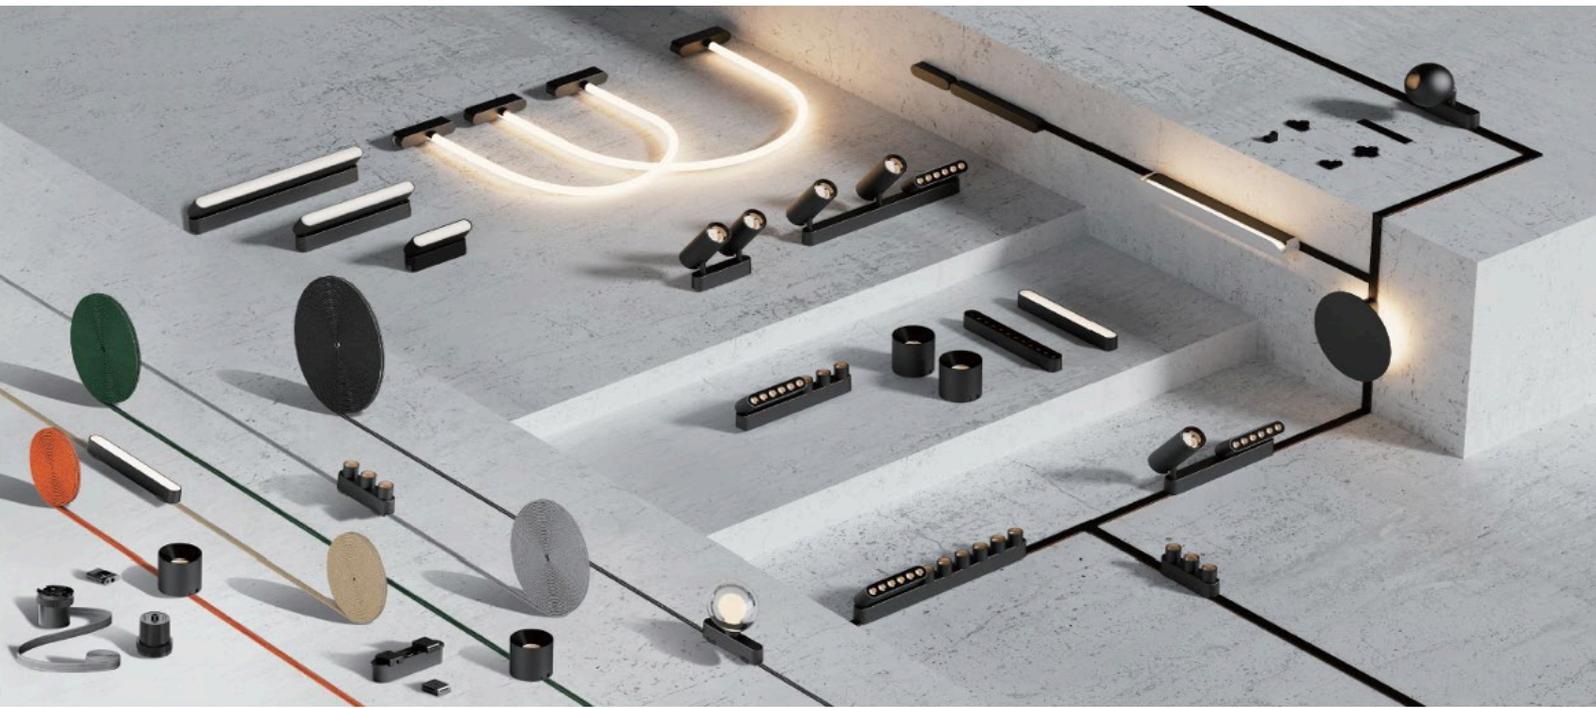

Belt

Ultra thin linear track

Full range of lamps

24V PRODUCT DISPLAY

The whole series of lamps can be freely matched to make the lighting space more flexible



**ULTRA THIN LINEAR TRACK
Installation Effect**

Choose installation way according to your needs

- | | | | |
|--|--|---|--|
|  | 1
Surface mounted track |  | 2
I-connect |
|  | 3
L-connect |  | 4
Perpendicularity L-connect |
|  | 5
Power supply |  | 6
Cable Box |
|  | 7
Track Lights |  | 8
Folding light |
|  | 9
Surface mounted spotlights |  | 10
Solar eclipse Wall lamp |




Ultra thin linear track and Belt can be combined and used together

Choose installation way according to your needs




	1 Surface mounted track		2 Belt
	3 Large Fixed Nodes		4 Large Fixed Nodes + Input Module
	5 Small Fixed Nodes		6 Buckle
	7 Surface mounted spotlights		8 Surface mounted spotlights Linker * 2pcs
	9 Floodlight light		10 Floodlight light Linker * 2pcs

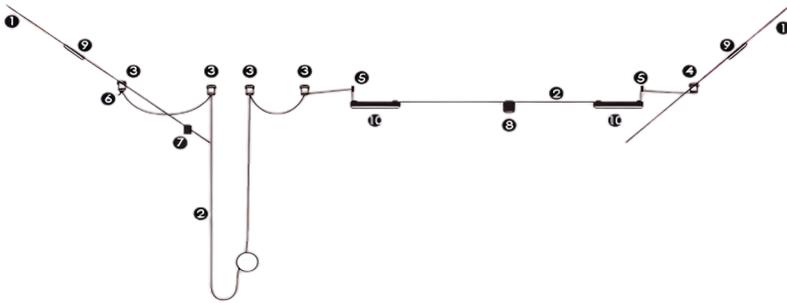

Belt Installation Effect

Choose installation way according to your needs

	1 Belt		2 Large fixed nodes + Input module
	3 Large fixed nodes		4 Small Fixed Nodes
	5 Buckle		6 Floodlight light + Linker * 2pcs
	7 White glass ball Linker * 2pcs		8 Surface mounted spotlights + Linker * 2pcs

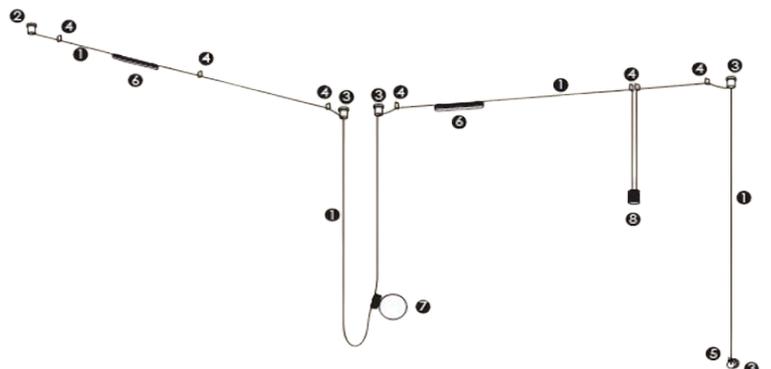



Belt can be used to separate in space

Choose installation way according to your needs



1
Belt



2
Large Fixed Nodes + Input Module



3
Large Fixed Nodes




4
Buckle



5
Floodlight light Linker * 2pcs



6
Glass ball + Linker * 2pcs

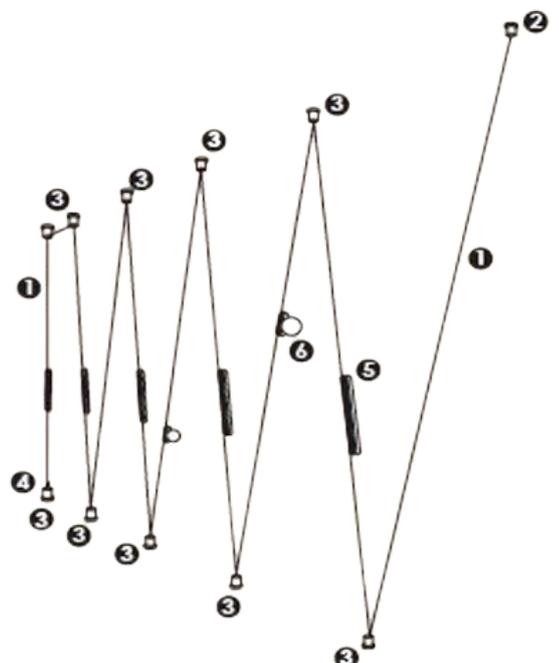

There are two systems in lighting fixtures option according to your needs



Version 1
Regular monochrome version

Color temperature:



3000K

4000K

6000K


NOTE

Dimming options:

Compatible with all 24V dimming power supplies
TRIAC , DALI , 0-10V




Version 2
Dip switch dual-mode version



Mode 1: Switchable light colors

With normal power supply
switchable for 3 CCT: White Light / Natural Light / Yellow Light




Mode 2: Simple upgrade to smart control

Luminaires are compatible with a wide range of control systems
The smart control solution is determined by choosing power supply type

Dual dialing code enables one luminaire to satisfy multiple needs,
solving stock problems and allowing users to change the functions
according to their needs.


INSTALLATION 24V LAMPS Grille light



Grille light 6 in 1
6W / 24° / 115x25x29mm



Grille light 12 in 1
12W / 24° / 222x25x29mm



Grille light 18 in 1
18W / 24° / 330x25x29mm



Voltage: DC 24V



Color: Black / White



Flicker Free: <3%



CRI: >90



Material: Aluminum+PC



Optic: Lens



Lamps can be made in two versions

Version 1
Regular monochrome

Version 2
Dip switch dual-mode