


KASE




DIMMING BUTTON
at the back of the track light



SIZE
01



WATTS
25 | 30 | 35



BEAM ANGLES
SPOT | OVAL | WIDE FLOOD



INGRESS
IP 20



TECHNICAL DATASHEET

KASE

TRACKLIGHTS

Kase Square tracklight collection is based on vertical & horizontal rotary design. Offered wattages are 25W, 30W & 35W in Spot, Medium, Flood & Oval beam options. Reflector options in black & white to adapt to site requirements within the standard color spectrums.

Luminaire can be used for basic lighting, focus lighting and wall wash effects. Luminaire can be adjusted 100° vertical and 350° in horizontal rotation. The complete range is IP20 suitable for indoor applications as offered.


Standard protocol for fixed output driver is offered in our article coding. Dimmable driver options are available on request. Auto-manuall dim provided in fixture.



Application Areas

Shopping centers, Retail outlets, Hospitals, Super markets

Ratings

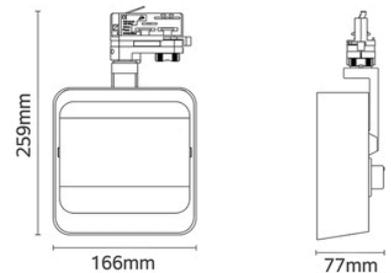

Technical Specifications

| | | |
|--------------------------------|---|------------------------------------|
| Light Source LED COB | Power Factor 0.9 | Efficacy 100 lm/w |
| Lifespan 50000 Hrs | Dimming Triac / 0-10v / Dali | Input Voltage AC220-240V |
| CRI 80 | Material Diecast Aluminum and Glass | |

Dimensions (mm)

| | A | B | C |
|--------|-----|-----|----|
| Size 1 | 259 | 166 | 77 |

Available Options

| Light Distribution | | Watt | Lumen | Color Temp | Finishes |
|--------------------|--------------------|------|-------|------------|----------|
| 12 deg | Medium (M) | 25 | 2250 | 3000 K | White |
| | 35X70 deg Oval (O) | 30 | 2700 | | |
| 38 deg | Wide Flood (F) | 35 | 3150 | 4000 K | Black |
| | | | | 5000 K | |

TECHNICAL DATASHEET

KASE**TRACKLIGHTS****SIZE 1**

DIMENSION -
259X166 mm

| Article Reference | Finish | Watt | Lumen | Colour Temp | Beam Angle |
|-------------------|-----------|------|---------|-------------|-------------|
| KA 114 025 3 S | White (1) | 25 | 2250 lm | 3000 K | 12 deg |
| KA 114 025 4 S | White (1) | 25 | 2250 lm | 4000 K | 12 deg |
| KA 114 025 5 S | White (1) | 25 | 2250 lm | 5000 K | 12 deg |
| KA 124 025 3 S | Black (2) | 25 | 2250 lm | 3000 K | 12 deg |
| KA 124 025 4 S | Black (2) | 25 | 2250 lm | 4000 K | 12 deg |
| KA 124 025 5 S | Black (2) | 25 | 2250 lm | 5000 K | 12 deg |
| KA 114 030 3 W | White (1) | 30 | 2700 lm | 3000 K | 38 deg |
| KA 114 030 4 W | White (1) | 30 | 2700 lm | 4000 K | 38 deg |
| KA 114 030 5 W | White (1) | 30 | 2700 lm | 5000 K | 38 deg |
| KA 124 030 3 W | Black (2) | 30 | 2700 lm | 3000 K | 38 deg |
| KA 124 030 4 W | Black (2) | 30 | 2700 lm | 4000 K | 38 deg |
| KA 124 030 5 W | Black (2) | 30 | 2700 lm | 5000 K | 38 deg |
| KA 114 035 3 O | White (1) | 35 | 3150 lm | 3000 K | 35 x 70 deg |
| KA 114 035 4 O | White (1) | 35 | 3150 lm | 4000 K | 35 x 70 deg |
| KA 114 035 5 O | White (1) | 35 | 3150 lm | 5000 K | 35 x 70 deg |
| KA 124 035 3 O | Black (2) | 35 | 3150 lm | 3000 K | 35 x 70 deg |
| KA 124 035 4 O | Black (2) | 35 | 3150 lm | 4000 K | 35 x 70 deg |
| KA 124 035 5 O | Black (2) | 35 | 3150 lm | 5000 K | 35 x 70 deg |