


MUNDO


LUMALIF



SIZE
RECESSED | SURFACE



WATTS
10 | 15



BEAM ANGLES
SPOT | MEDIUM



INGRESS
IP 40

TECHNICAL DATASHEET

MUNDO

DOWNLIGHT

Mundo downlight collection is based on vertical & horizontal rotary design. Offered wattages are 10W & 15W in a Spot & Medium beam option and as made available across 1 size that fits all - surface mounted, recessed or track mounted options to adapt to site requirements within the standard color spectrums.

Luminaire can be adjusted 90° vertical and 320° in free rotation. The complete range is IP40 suitable for indoor applications as offered.


Standard protocol for fixed output driver is offered in our article coding. Dimmable driver options are available on request.



Application Areas

Shopping centers, Retail outlets, Hospitals, Super markets

Ratings

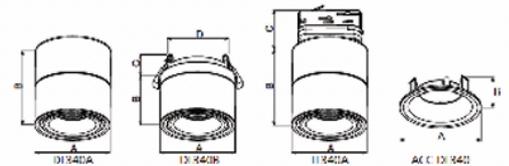

Technical Specifications

Light Source LED COB	Power Factor 0.9	Efficacy 100 lm/w
Lifespan 50000 Hrs	Dimming Triac / 0-10v / Dali	Input Voltage AC220-240V
CRI 80	Material Diecast Aluminum and Glass	

Dimensions (mm)

	A	B	C	D
Recessed	100	70	30	85
Surface	100	108	58	

Available Options

Light Distribution	Watt	Lumen	Color Temp	Finishes
20 deg Spot (S) / 36 deg Medium (M)	10	1100	2700 K	White
	15	1550	3000 K	Black
			4000 K	

TECHNICAL DATASHEET

MUNDO

DOWNLIGHT

SURFACE

Article Reference	Finish	Watt	Lumen	Colour Temp	Beam Angle
MU 112 010 2 S	White (1)	10	1100 lm	2700 K	20 deg
MU 112 010 3 S	White (1)	10	1100 lm	3000 K	20 deg
MU 112 010 4 S	White (1)	10	1100 lm	4000 K	20 deg
MU 122 010 2 S	Black (2)	10	1100 lm	2700 K	20 deg
MU 122 010 3 S	Black (2)	10	1100 lm	3000 K	20 deg
MU 122 010 4 S	Black (2)	10	1100 lm	4000 K	20 deg
MU 112 015 2 M	White (1)	15	1550 lm	2700 K	36 deg
MU 112 015 3 M	White (1)	15	1550 lm	3000 K	36 deg
MU 112 015 4 M	White (1)	15	1550 lm	4000 K	36 deg
MU 122 015 2 M	Black (2)	15	1550 lm	2700 K	36 deg
MU 122 015 3 M	Black (2)	15	1550 lm	3000 K	36 deg
MU 122 015 4 M	Black (2)	15	1550 lm	4000 K	36 deg

RECESSED

Article Reference	Finish	Watt	Lumen	Colour Temp	Beam Angle
MUR 112 010 2 S	White (1)	10	850 lm	2700 K	20 deg
MUR 112 010 3 S	White (1)	10	850 lm	3000 K	20 deg
MUR 112 010 4 S	White (1)	10	850 lm	4000 K	20 deg
MUR 122 010 2 S	Black (2)	10	850 lm	2700 K	20 deg
MUR 122 010 3 S	Black (2)	10	850 lm	3000 K	20 deg
MUR 122 010 4 S	Black (2)	10	850 lm	4000 K	20 deg
MUR 112 015 2 M	White (1)	15	1250 lm	2700 K	36 deg
MUR 112 015 3 M	White (1)	15	1250 lm	3000 K	36 deg
MUR 112 015 4 M	White (1)	15	1250 lm	4000 K	36 deg
MUR 122 015 2 M	Black (2)	15	1250 lm	2700 K	36 deg
MUR 122 015 3 M	Black (2)	15	1250 lm	3000 K	36 deg
MUR 122 015 4 M	Black (2)	15	1250 lm	4000 K	36 deg