



SLICK



SIZE
01 | 02 | 03



WATTS
15 | 30 | 45



BEAM ANGLES
MEDIUM | FLOOD



INGRESS
IP 20

TECHNICAL DATASHEET


SLICK

TRACKLIGHTS

Slick Linear tracklight collection is based on vertical & horizontal rotary design. Offered wattages are 15W, 30W & 45W in Flood beam options to adapt to site requirements within the standard color spectrums.

Luminaire can be adjusted 220° vertical and 350° in horizontal rotation. The complete range is IP20 suitable for indoor applications as offered.


Standard protocol for fixed output driver is offered in our article coding. Dimmable driver options are available on request.

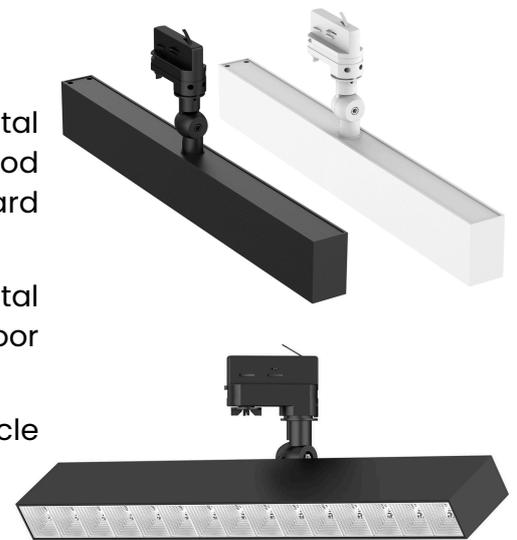

Application Areas

Shopping centers, Retail outlets, Hospitals, Super markets

Ratings

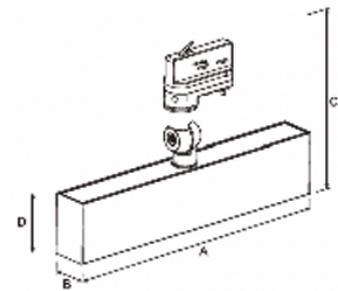

Technical Specifications

Light Source LED COB	Power Factor 0.9	Efficacy 100 lm/w
Lifespan 50000 Hrs	Dimming Triac / 0-10v / Dali	Input Voltage AC220-240V
CRI 80	Material Diecast Aluminum and Glass	

Dimensions (mm)

	A	B	C	D
Size 1	319.5	42	195.5	70
Size 2	424.5	42	195.5	70
Size 3	529.5	42	195.5	70

Available Options

Light Distribution	Watt	Lumen	Color Temp	Finishes
60 deg Flood (F) 38 deg Medium (M)	15	1450	3000 K	White
24 deg Medium (M)	30	2850	4000 K	Black
	45	4000	5000 K	

TECHNICAL DATASHEET

SLICK

TRACKLIGHTS

SIZE 1

DIMENSION - 319.5 mm

Article Reference	Finish	Watt	Lumen	Colour Temp	Beam Angle
SL 113 015 3 F	White (1)	15	1450 lm	3000 K	60 deg
SL 113 015 4 F	White (1)	15	1450 lm	4000 K	60 deg
SL 113 015 5 F	White (1)	15	1450 lm	5000 K	60 deg
SL 123 015 3 F	Black (2)	15	1450 lm	3000 K	60 deg
SL 123 015 4 F	Black (2)	15	1450 lm	4000 K	60 deg
SL 123 015 5 F	Black (2)	15	1450 lm	5000 K	60 deg

SIZE 2

Cut out dia - 424.5 mm

Article Reference	Finish	Watt	Lumen	Colour Temp	Beam Angle
SL 114 030 3 F	White (1)	30	2850 lm	3000 K	60 deg
SL 114 030 4 F	White (1)	30	2850 lm	4000 K	60 deg
SL 114 030 5 F	White (1)	30	2850 lm	5000 K	60 deg
SL 124 030 3 F	Black (2)	30	2850 lm	3000 K	60 deg
SL 124 030 4 F	Black (2)	30	2850 lm	4000 K	60 deg
SL 124 030 5 F	Black (2)	30	2850 lm	5000 K	60 deg

SIZE 3

Cut out dia - 529.5 mm

Article Reference	Finish	Watt	Lumen	Colour Temp	Beam Angle
SL 115 045 3 F	White (1)	45	4000 lm	3000 K	60 deg
SL 115 045 4 F	White (1)	45	4000 lm	4000 K	60 deg
SL 115 045 5 F	White (1)	45	4000 lm	5000 K	60 deg
SL 125 045 3 F	Black (2)	45	4000 lm	3000 K	60 deg
SL 125 045 4 F	Black (2)	45	4000 lm	4000 K	60 deg
SL 125 045 5 F	Black (2)	45	4000 lm	5000 K	60 deg